




- NOTES:**
1. ALL EDGES SHALL BE ROUNDED WITH A 24 R EXCEPT AS SHOWN.
 2. THE BARRIER SHALL BE ANCHORED AT THE ENDS OR AT INTERRUPTIONS WITH EITHER A DOWELED-IN CONNECTION OR A 255 DEEP MONOLITHIC FOOTING.

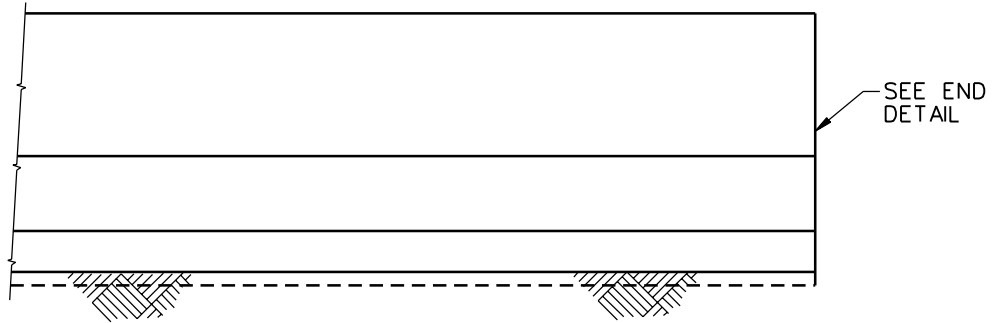

ELEVATION

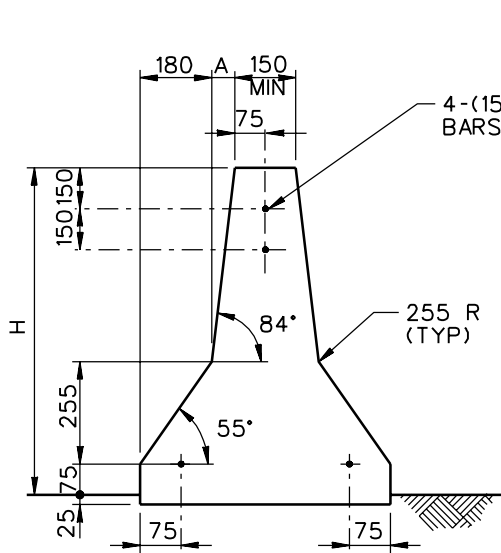

SECTION

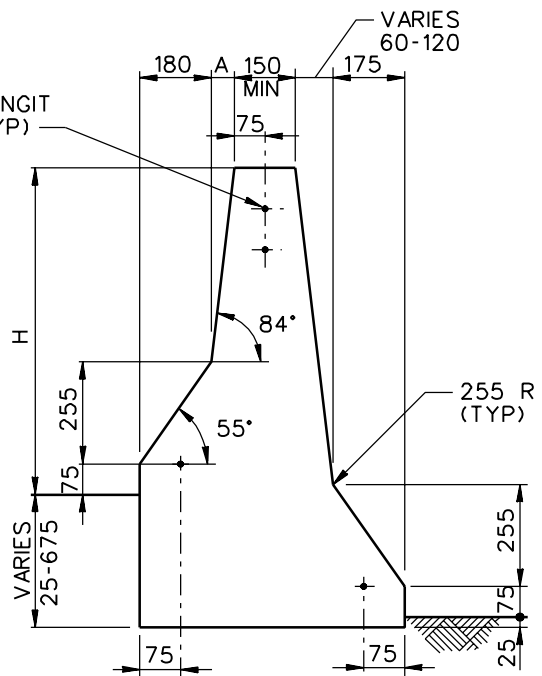

SECTION

| SYSTEM | A | H |
|--------|----|------|
| SGM11a | 50 | 810 |
| SGM11b | 80 | 1070 |


1994

SAFETY-SHAPE MEDIAN BARRIER


SGM11a-b

| SHEET NO. | REF. NO. |
|-----------|----------|
| 1 of 4 | MB5-NJ |

60000. A LENGTH OF 6000 IS THE MOST COMMON.
- BARRIER MAY BE MONOLITHIC WITH FOOTING OR IT MAY BE CONNECTED WITH 10 (25) REBAR DOWELS SET 2 IN LINE AT 610.
 - USE MINIMUM COVER OF 40.

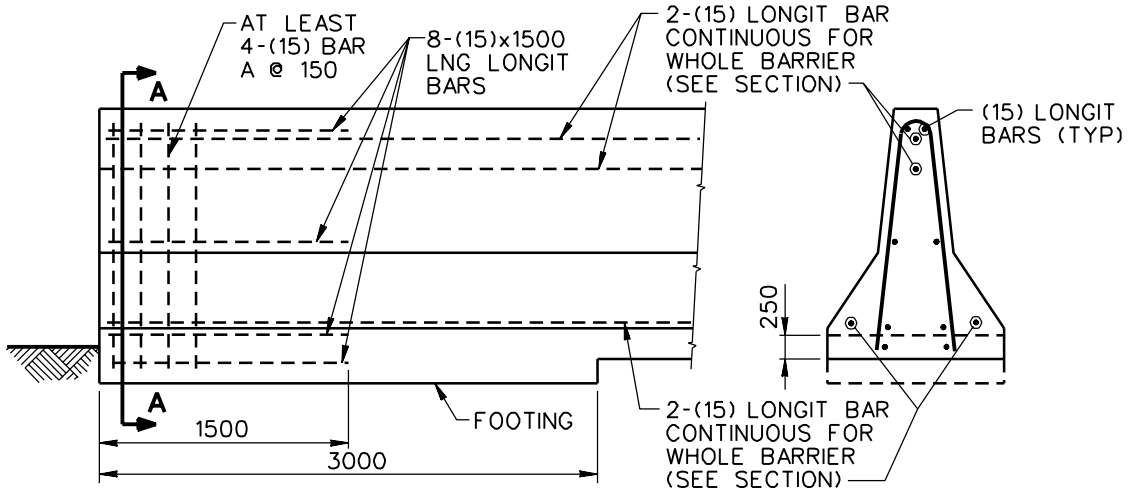

ANCHORAGE DETAIL

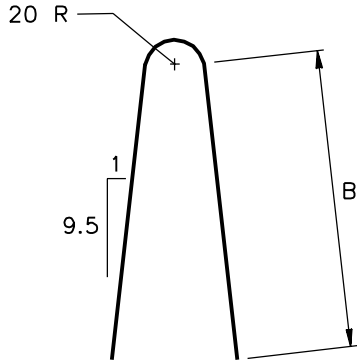

BAR A (15)

| SYSTEM | B |
|--------|------|
| SGM11a | 970 |
| SGM11b | 1250 |

1994

SAFETY-SHAPE MEDIAN BARRIER

SGM11a-b

| SHEET NO. | REF. NO. |
|-----------|----------|
| 3 of 4 | MB5-NJ |