



- NOTES:**
1. ALL EDGES SHALL BE ROUNDED WITH A 24 R EXCEPT AS SHOWN.
  2. THIS BARRIER DOES USE REINFORCEMENT STEEL.
  3. BARRIER RESTS DIRECTLY ON COMPACTED GRAVEL. 75 THICK PAVEMENT OR COMPACTED GRAVEL LAYER PROVIDES LATERAL SUPPORT TO THIS BARRIER.

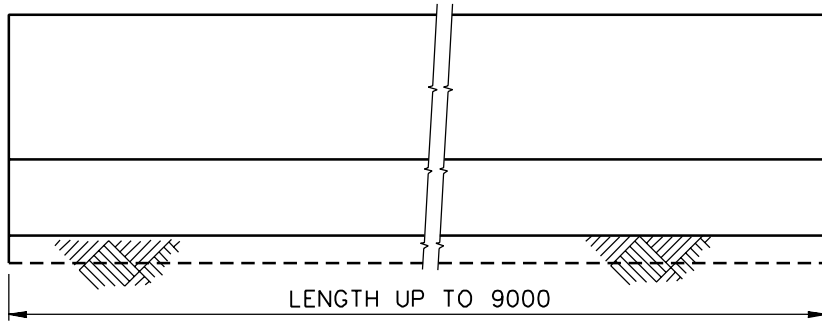

**ELEVATION**

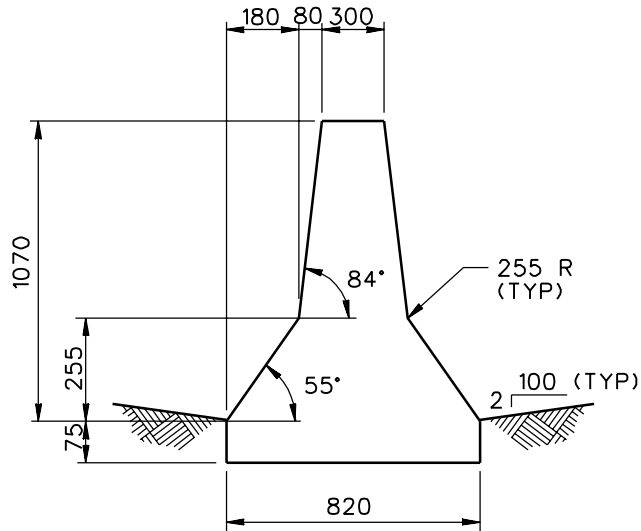

**SECTION**

1994

**TALL-WALL MEDIAN BARRIER**

**SGM12**

SHEET NO.	REF. NO.
1 of 2	